




BEFARD series BF 3402


BF 3402

The diagram shows the general technical parameters of the lifting capacity of the various versions of the cranes BF 3402 intended for both EU and non-European markets. For CE version (for European markets), the crane is delivered with diagrams lifting capacity not exceeding 990 kg.

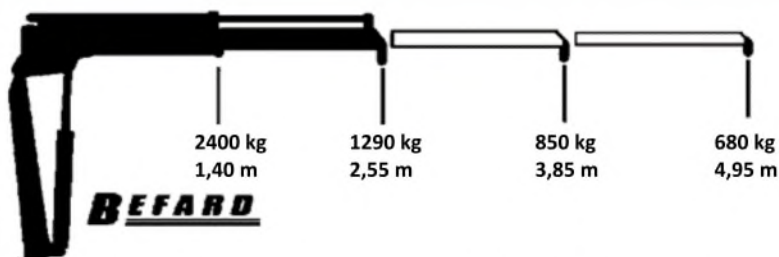


• Hydraulic extension: 1

• Manual extension: 2

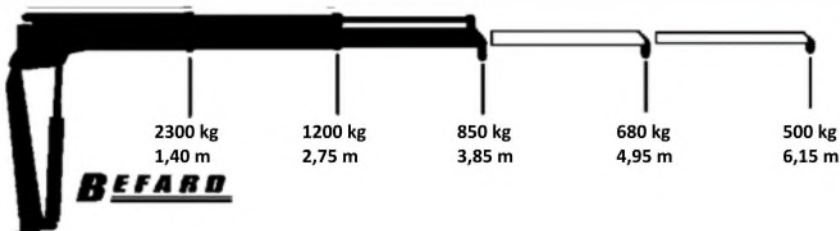

• Hydraulic extension: 2

• Manual extension: 2

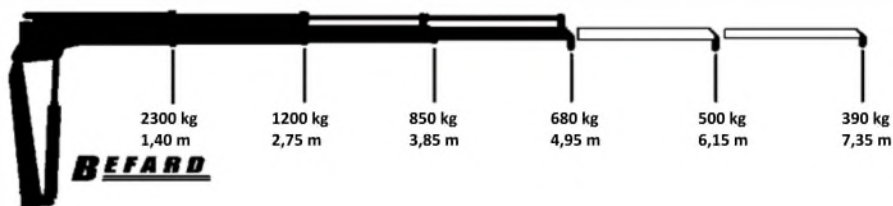

• Hydraulic extension: 3

• Manual extension: 2


TECHNICAL PARAMETERS**BF 3402**

Lifting moment	33 kNm	
Maximum lifting capacity CE	990 kg	
Maximum lifting capacity	2400 kg	
Hydraulic extension	2550 mm	
Maximum reach with manual extensions	4950 mm	
Crane height	1800 mm	
Transport width	2050 mm	
Spacing of supports	2950 mm	
Rotation angle	180-360°	
The moment of rotation (16 MPa)	3,5 kNm	
Stroke angle	70°	
Downward tilt angle	60°	
Working pressure	185 bar	
Recommended pump	Working pressure	280 bar
	Flow	13 l/min
Weight (does not include support feet)	280 kg	

Recommended pump flow, given in the card, may change depending on the power supply and the specification of the device that will be mounted to the crane. In standard applications, this is the maximum value.



BEFARD BF 3402.12

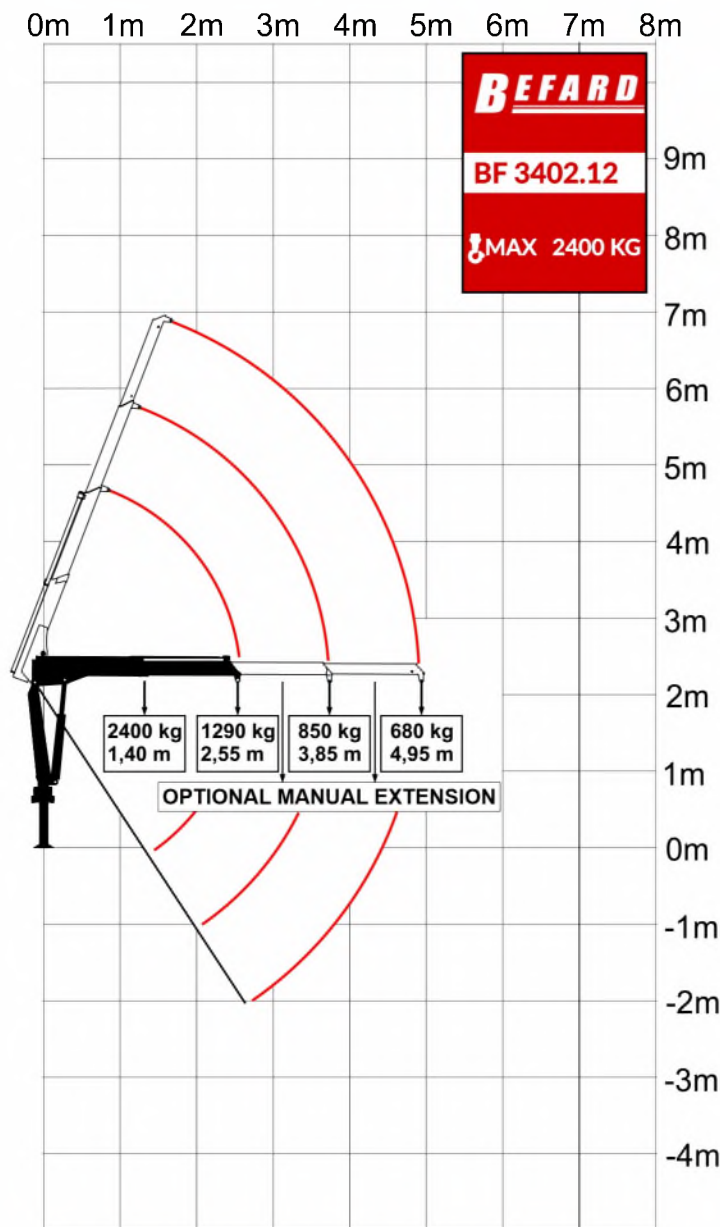


TECHNICAL PARAMETERS**BF 3402A**

Lifting moment	33 kNm	
Maximum lifting capacity CE	990 kg	
Maximum lifting capacity	2300 kg	
Hydraulic extension	3850 mm	
Maximum reach with manual extensions	6150 mm	
Crane height	1800 mm	
Transport width	2050 mm	
Spacing of supports	2950 mm	
Rotation angle	180-360°	
The moment of rotation (16 MPa)	3,5 kNm	
Stroke angle	70°	
Downward tilt angle	60°	
Working pressure	185 bar	
Recommended pump	Working pressure	280 bar
	Flow	13 l/min
Weight (does not include support feet)	298 kg	

Recommended pump flow, given in the card, may change depending on the power supply and the specification of the device that will be mounted to the crane. In standard applications, this is the maximum value.



BEFARD BF 3402A.12

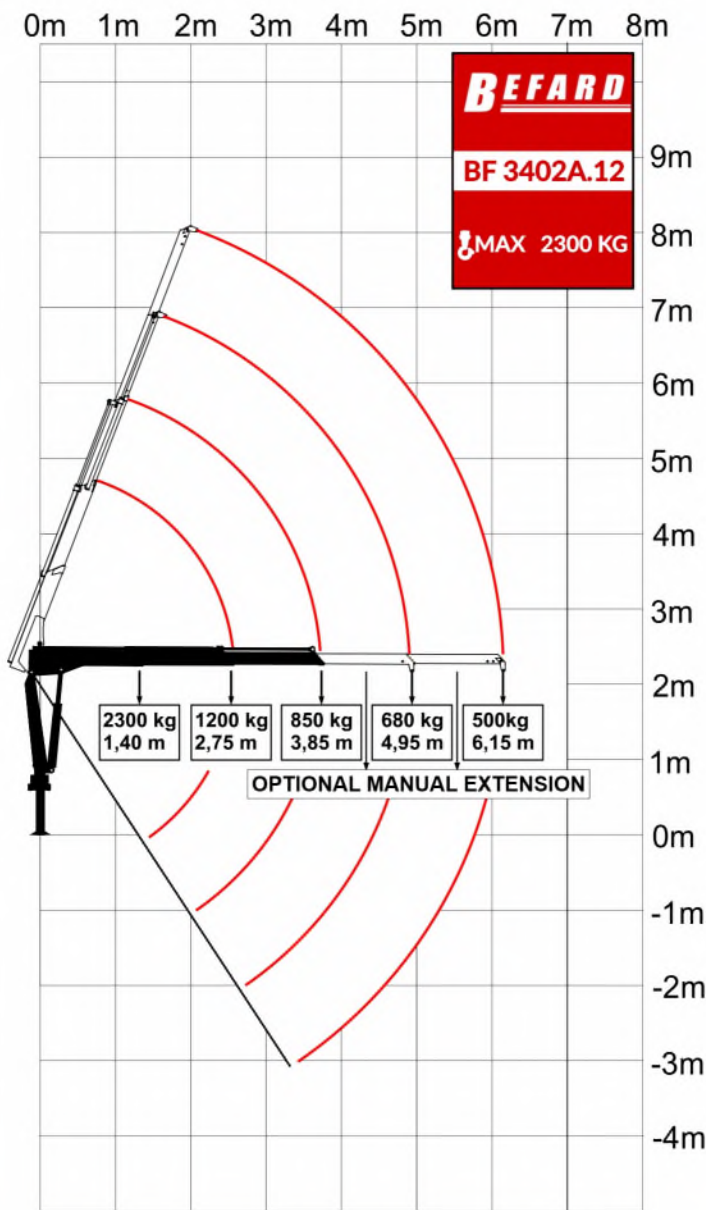


TECHNICAL PARAMETERS**BF 3402B**

Lifting moment	33 kNm	
Maximum lifting capacity CE	990 kg	
Maximum lifting capacity	2300 kg	
Hydraulic extension	4950 mm	
Maximum reach with manual extensions	7350 mm	
Crane height	1800 mm	
Transport width	2050 mm	
Spacing of supports	2950 mm	
Rotation angle	180-360°	
The moment of rotation (16 MPa)	3,5 kNm	
Stroke angle	70°	
Downward tilt angle	60°	
Working pressure	185 bar	
Recommended pump	Working pressure	280 bar
	Flow	13 l/min
Weight (does not include support feet)	310 kg	

Recommended pump flow, given in the card, may change depending on the power supply and the specification of the device that will be mounted to the crane. In standard applications, this is the maximum value.



BEFARD BF 3402B.12

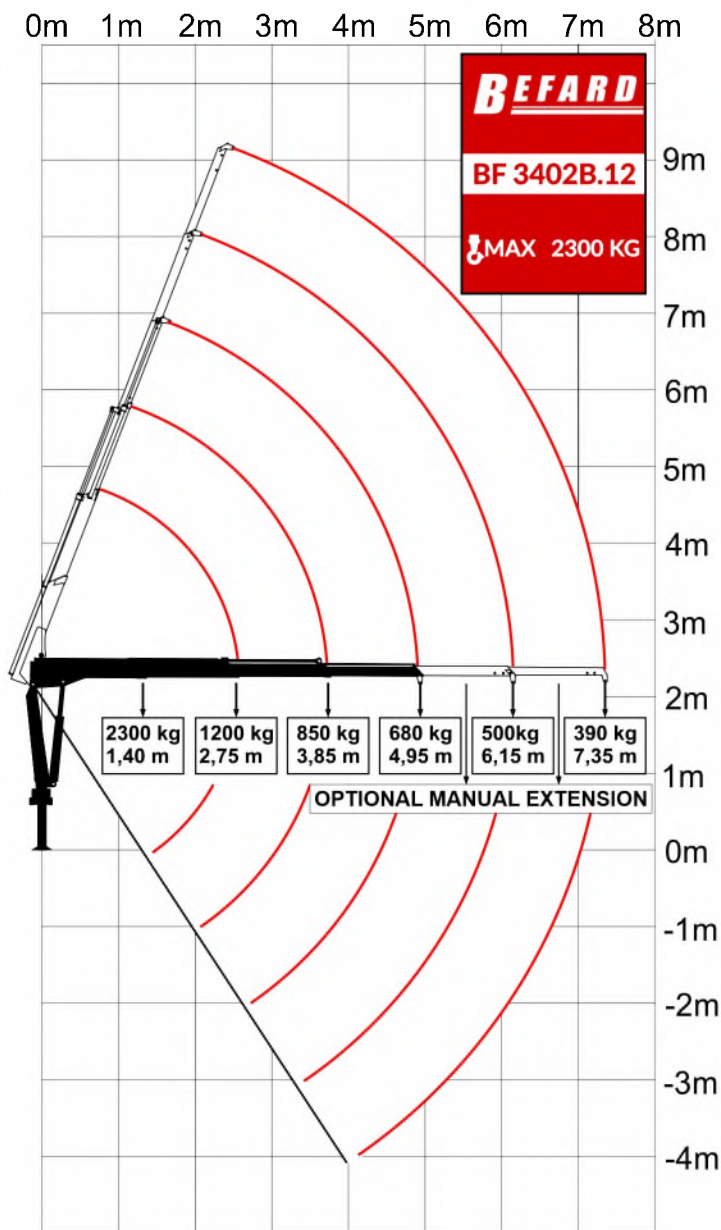



It raises as much as 2.4 tons



Perfect for everyone truck



Most often selected model



SPECIFICATION

- The CE version meets the essential requirements of the Machinery Directive 2006/42/EC and directive 2004/108/EC
- Safety STOP switch
- Double-action locks protecting the extension cylinders
- Reinforced hydraulic hoses
- Two-sided support, lowered (up-down) hydraulically
- Spring protection preventing uncontrolled sliding of supporting beams
- Hook 3,2t
- Radio control
- The possibility of adaptive development
- Bronze sliding bushings



Radio control